



Model 35V/35G

Pneumatic Vacuum Sealer

- Available with Vacuum or Gas-Vacuum configurations.
- Independent vacuum and seal bars.
- Stationary vacuum nozzle to eliminate particle generation during operation.
- Isolated exhaust port – route exhaust air outside the immediate work area.
- Excellent for cleanroom environments.



Model 35

The Accu-Seal 35 vacuum sealer has become the time-tested industry standard for economical table-top vacuum sealing or gas-vacuum sealing. This is particularly true in the demanding electronics cleanroom environments for which they were designed.

Leader in the Field

Accu-Seal leads the field of table top Vacuum Sealers. We were first to combine Cleanroom-friendly venturi vacuum generators, stationary nozzle, and a clean exterior design with our exclusive independent vacuum and heat seal jaw design. This maintains consistent vacuum levels and leak-proof seals over a longer productive life.

Exceptional Value

Superior design, advanced manufacturing techniques, quality testing, and our two-year warranty - typical of the engineering excellence built into every Accu-Seal machine.

Customer Service

Our dedicated sales and technical support teams are knowledgeable and ready to assist you when you call about your application. We work to set the industry standard for responsiveness and service to both existing and new customers.

Two-Year Limited Warranty

We are confident with the quality and reliability of our products and offer a Two-Year Limited Warranty for most Accu-Seal machines. For further details please contact the Accu-Seal sales department.

Compare the Features. Experience the Difference.

Call your Accu-Seal Representative today to learn more.

Ph: 800-452-6040 or 760-591-9800 Email: info@accu-seal.com

Model 35 Vacuum Sealer


Equipment Specifications

BUILT-IN FEATURES

- 60 Second Adjustable Electronic Vacuum Timer
- 10 Second Adjustable Electronic Gas Timer (Gas/Vac Model)
- 10 Second Adjustable Electronic Heat Timer
- 60 Second Adjustable Electronic Cool Timer
- Electronic Foot Switch Activator (can also be used to extend or override vacuum timer)
- Jaw-Closed/Heat-Only Safety Circuit
- Operating Mode Switch:
 - Gas-Vacuum-Seal Sequence (Gas/Vac Model)
 - Vacuum-Seal Sequence
 - Seal Only
- Gas Pressure Regulator and Gauge (Gas/Vac Model)
- Vacuum Gauge

SPECIFICATIONS

- Seal Widths: 1/4" Standard.
Other seal widths and styles also available
- Seal Lengths: 20, 25 and 30 inches
- Vacuum Pressure: Up to 26 in Hg Standard
- Suction Flow: Up to 4.8 CFM (1.4 Standard)
- Requirements:
 - Power: 120 Vac, 7 Amps (20")
 - Air: 1.0 CFM @ 80 PSI
- Size:
 - Length: Seal Length +5.5"
 - Width: 9.5"
 - Height: 8.5"
- Approximate Weight: 26-40 lbs.

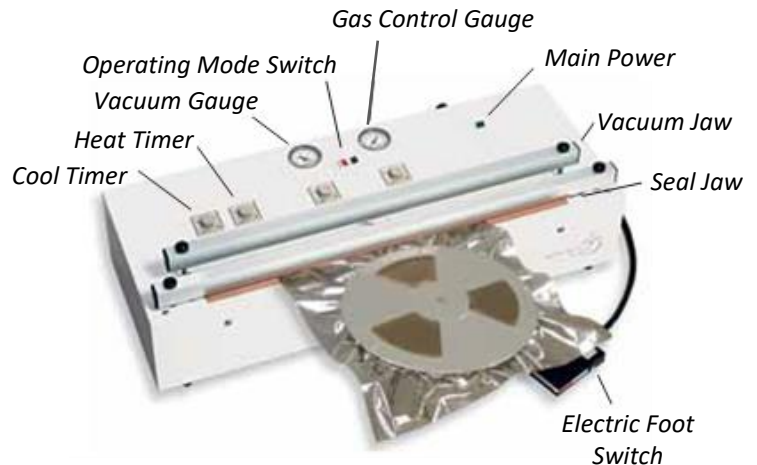

FACTORY OPTIONS & ACCESSORIES

- Gas Purge System
- 220 Vac Conversion
- CE
- Product Support Tray
- Ergonomic Multi-Position Accu-Seal Stand
- Standard Industrial Air Compressor
- Stand
- Industrial Air Compressor
- Ultra-Quiet Lab/Office Compressor

CLEANROOM FEATURES

- Non-Particle Generating Venturi Vacuum System
- Clean Design (To Class 100)

MOISTURE INSURANCE

The Accu-Seal 35 helps insure the integrity of your products. When used with a heat sealable, electrostatic safe (ESD), moisture vapor barrier bag with desiccant and humidity indicator card, it provides the maximum protection against moisture and oxygen contamination.



Optional ultra-quiet lab/office compressor



Optional ergonomic multi-position stand (actual model not shown)

Features and specifications subject to change without notice.